

Investigation Of Passenger Car Using Macpherson Strut For Front Suspension System PT. 1: Vehicle Behavior Variation Of Time Response.

T. Ali^{*}, R.A. Bakar, and Gan L.M.

Faculty of Mechanical Engineering, Universiti Malaysia Pahang (UMP),
26600 Pekan, Pahang, Malaysia,
Phone: +6094246200; Fax: +6094246222
^{*}Email: tanty.ali@gmail.com

ABSTRACT

It has been decade researchers has been conducting researches on the topics concerning vehicle behavior. Suspension system, driving maneuver and road profile are the particular parameters in order to achieve the aim in vehicle behavior understanding. This paper combined these three criteria by means of using a passenger car equipped with MacPherson strut front suspension undergoes different driving behavior. For this study, Proton Persona Sedan 1.6 Manual Transmission Base Line was used to investigate MacPherson strut suspension system. Data were collected using DEWESoft Software. This experiment resulted on the vehicle behavior based on the velocity and direction variation of time response. The most simple quarter car model described requires basic dynamic phenomena. It can be concluded that MacPherson strut suspension system has an effect on not only vehicle behavior but also comfort ride. These findings provide the following insights for future research in suspension vibration in order to optimize the performance of MacPherson strut suspension system.

Keywords: Passenger car; MacPherson strut; front suspension.

INTRODUCTION

Road vehicle suspensions producing momentum and guidance forces are essential for driving safety. The driver is controlling these forces during accelerating, braking and steering the vehicles [1]. For a road vehicle, the suspension system isolates the occupants or cargo from severe levels of shock and vibration induced by the road surface. This isolation from road induced shock and vibration also improves the longevity and durability of the vehicle [2].

Just as importantly, the suspension system enables the wheels to maintain contact with the road, assuring stability and control of the vehicle [2]. The suspension system allows the springs and shock absorbers to absorb the energy of the bump, so drivers and passengers can have smooth ride. While doing these two jobs, the suspension system must not allow loose, uncontrolled movement of the tire and wheel and must keep the alignment of the tire as correct as possible [3,4]. Figure 1 shows front suspension diagram.



Figure 1. MacPherson strut suspension

Earle was the one whom patented MacPherson strut with the idea of locating the lower end of an inclined strut system tangentially with transverse link (or track control arm) and longitudinally by means of the lever arm of the anti-roll bar [2]. Thus, this paper will study the effect of passenger car equipped with MacPherson strut front suspension system vehicle behavior based on different driving maneuvers.

Quarter Car Model

In general, there are two kinds of approaches in dynamic analysis of a vehicle. The first approach relies on experimental analysis and field test; the second one utilizes computer simulation to conduct a numerical analysis. Figure 2 shows quarter vibration model in suspension system analysis [5,6,7].

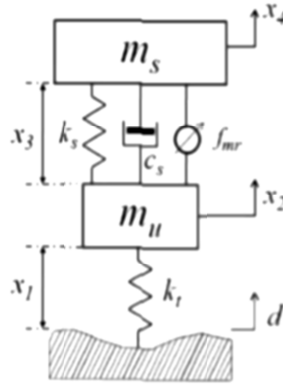


Figure 2. Quarter car vibration model.

The general equation of motion for any vibration model assigned to vehicle can be defined as follow [5,6,7,8,9]:

$$[M]\{\ddot{X}\} + [C]\{\dot{X}\} + [K]\{X\} = \{P\} \quad (1)$$

Where: $[M]$ is mass matrix, $[C]$ is damping coefficient matrix, $[K]$ is stiffness matrix and $\{P\}$ is defined as imposed force on the vehicle by the road.

DESIGN OF EXPERIMENT

In this study, the experiment is using Proton Persona Sedan 1.6 Manual Transmission Base Line. This test car is equipped with MacPherson strut for the front suspension and multi-link with stabilizer for the rear suspension. In addition, the test car is equipped with wire potentiometer, accelerometer, GPS, speed, tire slip angle, gyroscope, rotating wheel sensor that connected to the data acquisition system that has been installed with DEWESoft Software to collect and monitor the data. To check the performance on varying speed ranging from 20 to 120 km/h [10]. The gear shifting for the experiment need to follow the maximum speed of each gear (Table 1).

Table 1. Maximum speed of gear.

Gear	Maximum Speed
1	20 km/h
2	40 km/h
3	60 km/h
4	80 km/h
5	>80 km/h

Acceleration

The testing started recording at the static condition (velocity 0 km/h). The pedal is pressed based on the maximum velocity for each gear (Table 1). This test is run for five times to gain the consistent results. This procedure is repeated for each different speed which on paved road 0 – 60 km/h and 0-90 km/h whiles the unpaved road is at 0-40 km/h and 0-60 km/h.

Deceleration

The car is drove until reached 90 km/h and the speed is maintained for deceleration 90 km/h to 0 km/h. When the car reached the first cone reference spot (i) as in Figure 3, the test is started to record and the clutch paddle is pressed. The pedal is pressed based on the maximum velocity for each gear (Table 1). As the front tire car reach the second cone reference spot (ii), the clutch paddle is released and the brake pedal is pressed steadily until the car has stopped within the stopping range. The recording is stopped when the final speed is at 0 km/h. The test is repeated five times. This procedure is repeated for each different speed which on paved road 60-0 km/h and 90-0 km/h whiles the unpaved road is at 45 – 0 km/h and 65 – 0 km/h.

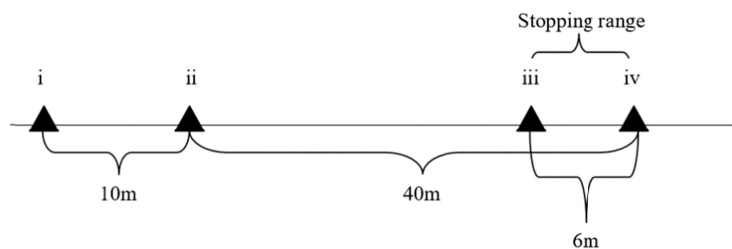


Figure 3. Cone placement for deceleration testing.

Cornering

Test car is drove at the inner diameter of the road until reached the speed of 25 km/h. The driver needs to follow the maximum velocity for each gear (Table 1) that has been set. When the velocity speed reached 25 km/h the recording started. Based on Figure 4, it ended as the car finishes a complete circle of the roundabout which this can be referred on the GPS reading. This test is repeated for five times to ensure the reliability of data gained. The test is repeated at the diameter 100 m for 40 km/h and a 50 km/h while at the roundabout with diameter 50 m is running the initial velocity at 25 km/h and 40 km/h. At the diameter 50 m did not run 50 km/h because of safety purpose which is already been considered.




Figure 4. Cone placement for cornering testing.

Bumpy

The test car is drove until velocity 30 km/h is reached and maintained. The driver has to press the pedal based on the maximum velocity for each gear (Table 1). The test is recorded when the front tire reached the first cone spot (i) as in Figure 5 and ended when the rear tire passed by the second cone (ii). This test is repeated five times and then followed by different constant velocity at 40 km/h and 50 km/h.

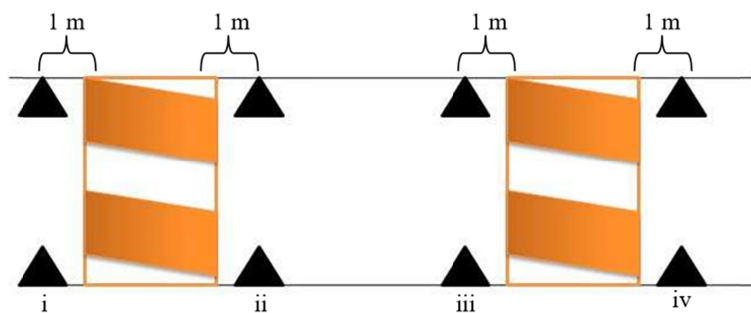


Figure 5. Cone placement for bumpy testing.

RESULTS AND DISCUSSION

Variation of Time Response

In this part showed the variation of testing velocity in time response. The Figure 6 until Figure 9 below showed the relationship of the velocity and direction of the vehicle with the increment of time. These graph clarified the different of the driver driving behavior. The pattern of graph displayed the velocity is increased during acceleration (Figure 6) and decreased during deceleration (Figure 7).

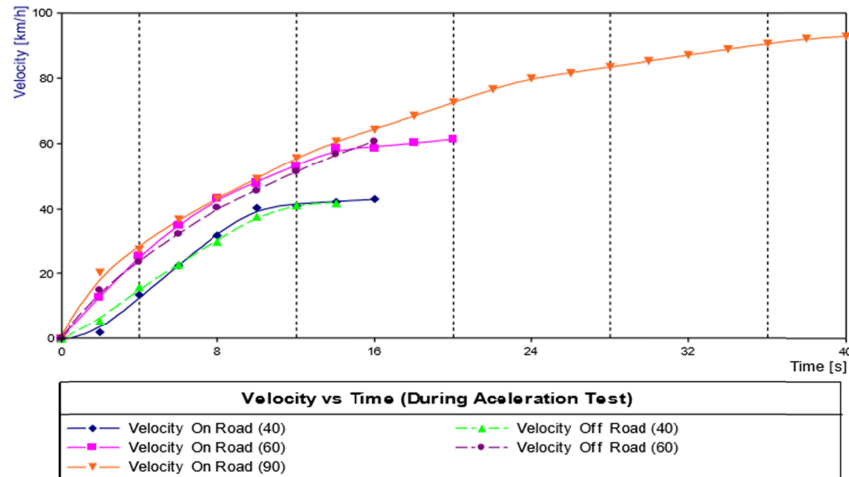


Figure 6. Graph of Velocity versus Time during the acceleration test.

The time response for the acceleration test is longest during the test 90km/h on road that results in 40 seconds. As for the first acceleration test from 0 km/h to 40 km/h the testing is only at the 2nd gear. After the driver reached the speed vehicle at 40 km/h the driver need to maintain until 5 seconds. This is for the storing data by DEWESoft so that the results will be constant at final velocity of testing at the end of the testing.

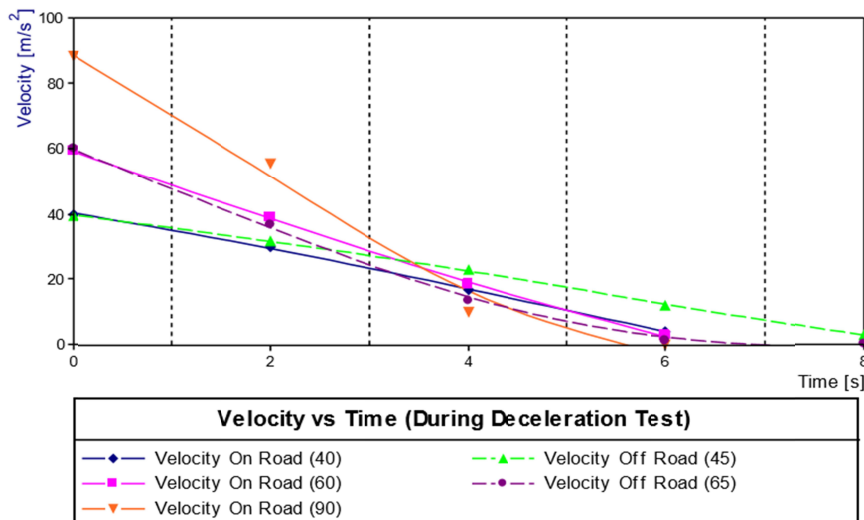


Figure 7. Graph of Velocity versus Time during the deceleration test.

The longest time taken during the deceleration test on the off road at the speed if 45 km/h. Due to the off road condition, the tire undergo slip. In addition, during the deceleration test, the clutch paddle is pressed when the car is almost to stop to avoid engine end abruptly. So, this experiment demonstrated that the performance of the suspension system is typically rated as to provide improved passenger comfort and avoid hitting [11].

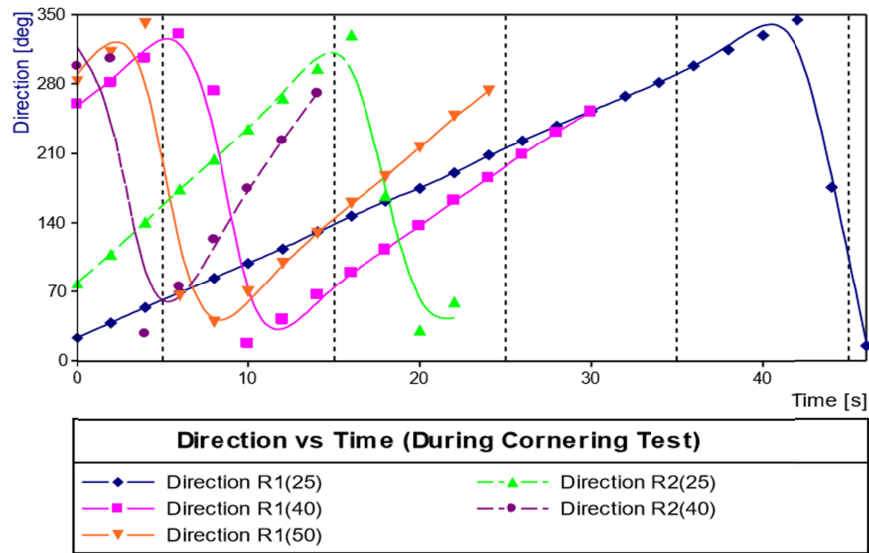


Figure 8. Graph of Direction versus Time during the cornering test.

The direction of the test car is projectile in the cornering test in Figure 8, it can be seen that this testing the test car is at constant speed. The test car results in constant after five second on the bumpy test (Figure 9). Besides, Deflections of suspensions of front at different bump size are shown in Figure below where deflection for right and left wheels is approximately same [7]. Along with that graphical representation of comparison between speed, vehicle acceleration and road roughness [9].

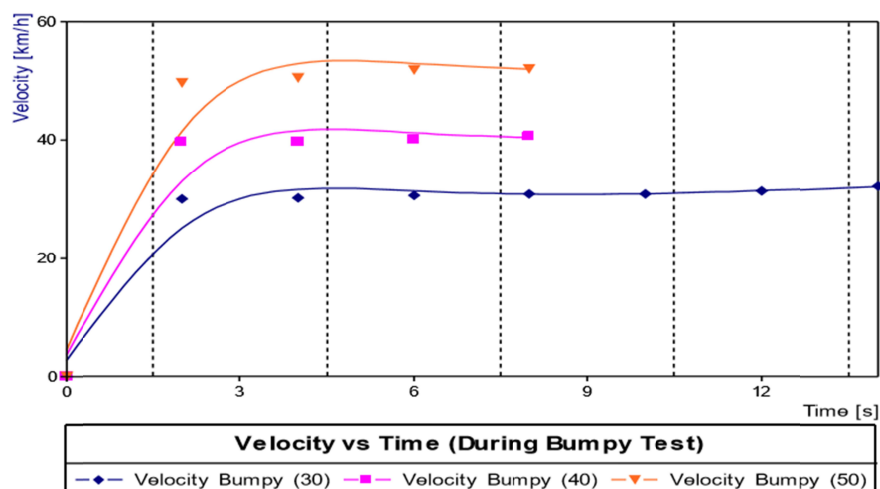


Figure 9. Graph of Velocity versus Time during the bumpy test.

As the velocity and direction varies with time, the vehicle response subjected to stationary excitation, while it varies with different velocity and different type of road. Theoretically, throughout acceleration, deceleration and bumpy test the suspension mechanism support the weight of the vehicle yet to cushion bumps and holes in the road. During the steady state cornering the suspension sustained traction between the tires and the road in order to align the wheels.

The term “ride comfort” is related to absorption of the energy from road bumps and its dissipation without causing undue oscillation in vehicle. Undue oscillation, also known as vibration, affects the ride quality of the passenger and driver [11]. The term “road handling” relates with vehicle weight transfer from side to side and front to back during cornering and braking action. Thus, a vehicle with good road handling minimizes the weight transfer and thus will add in increasing the traction force between vehicle and road surface [12].

CONCLUSIONS

Generally, road vehicle suspensions are producing vertical forces in the contact of the tires on the road that provide horizontal contact forces for vehicle propulsion and guidance. These static contact forces existed by dynamic loads due to suspension system behavior based on the unevenness surface. This paper has achieved the objective on showing the pattern of vehicle behavior with different driving maneuvers based on experimental results presented and discussed. It can be concluded that MacPherson strut suspension system has an effect on not only vehicle behavior but also comfort ride. Conversely, both of ride comfort and vehicle handling requirements are conflicting while designing a vehicle suspension. Consequently, this study can be continued by analyzing the MacPherson strut suspension behavior in order to optimize the standard of ride comfort and vehicle handling under all driving conditions.

ACKNOWLEDGEMENTS

The authors would like to thank the FKM final year students for the encouragement to carry this research work. Also the technical staff of FKM for the assistance during the experimental session using the UMP Test Car.

REFERENCES

- [1] W. Schiehlen, and I. Iroz, “Uncertainties in road vehicle suspensions,” *Procedia IUTAM*, vol. 13, pp. 151-159, 2015.
- [2] D. Bastow, G. Howard, and J.P. Whitehead, “Car suspension and handling,” *Wallendale: Society of Automotive Engineers International*, 2004.
- [3] T.W. Birch, *Automotive suspension and steering system*, New York: Delmar Publisher, 1999.
- [4] W.H. Crouse, and D.L. Anglin, “Automotives mechanics,” New York: McGraw-Hill, pp. 658-710, 1993.
- [5] H.B. Dehkordi, “Vibration and force analysis of lower arm of suspension system,” *Universite Du Quebec*, 2014.

- [6] A. Kanjanavapastit, and A. Thitinareumit, "Estimation of a speed hump profile using quarter car model," *Procedia Social and Behavioral Sciences*, vol. 88, pp. 265-273, 2013.
- [7] A. Gupta, and V. Rastogi, "Effects of various roadconditions on dynamic behavior of heavy road vehicle," *Procedia Engineering*, vol. 144, pp. 1129-1137, 2016.
- [8] E. Alvarez-Sanchez, "A quarter-car suspension system: car body mass estimator and sliding mode control," *Procedia Technology*, vol. 7, pp. 208-214, 2013.
- [9] M. Hadpe, D.S. Deshmukh, and P.M. Solanki, "Vibration analysis of a two wheeler (Analytically)," *International Journal of Innovative Research in Science, Engineering and Technology*, vol. 3, pp. 17415-17421 (ISSN: 2319-8753), 2014.
- [10] M.P. Nagarkar, G.J.V. Patil, and R.N.Z. Patil, "Optimization of nonlinear quarter car suspension-seat-driver model," *Journal of Advanced Research*, 2016.
- [11] A. Mehmood, A.A. Khan, and A.A. Khan, "Vibration analysis of damping suspension using car models," *International Journal of Innovation and Scientific Research*, vol. 9, pp. 202-211, 2014.
- [12] S.K. Sharma, V. Pare, M. Chouksey, and B.R. Rawal, "Numerical studies using full car model for combined primary and cabin suspension," *Procedia Technology*, vol. 23, pp. 171-178, 2016.